


Bore	Stroke									
	5	10	15	20	25	30	35	40	45	50
Φ32	○	○	○	○	○	○	□	□	□	□
Φ40	○	○	○	○	○	○	○	○	□	□
Φ50	○	○	○	○	○	○	○	○	○	○
Φ63	○	○	○	○	○	○	○	○	○	○
Φ80	○	○	○	○	○	○	○	○	○	○

Specification


Series	ISD
Hydraulic cylinder	Φ32, Φ40, Φ50, Φ63, Φ80
Fluid	Oil pressure acting oil
Pressure	3~140Kgf/cm
Proof pressure	210Kgf/cm
Speed	8~100mm/sec
Temperature	-10~+70

Ordering code

ISD 50 × 50 B

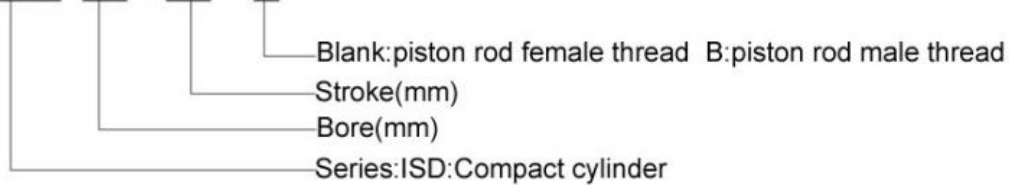

Dimensions

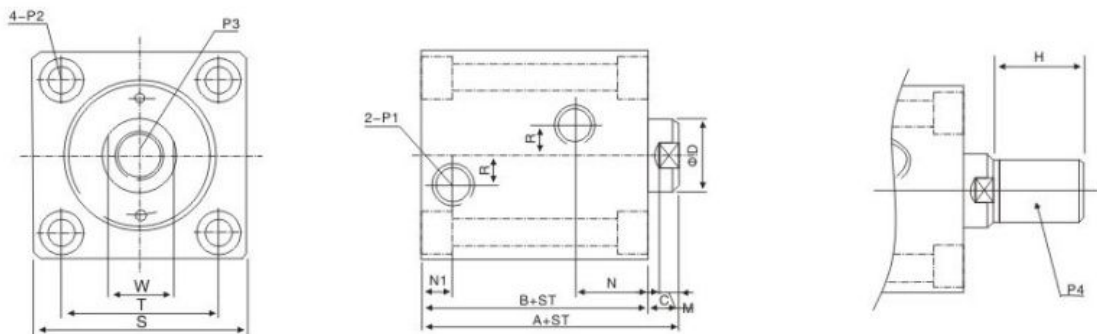

Bore	A	B	C	D	H	M	N	N1	P1	P2	P3	P2	M	N	N1	P1
32	64	54	10	20	25	7	25.5	10	1/4							
40	65	55	10	25	30	7	24.5	10.5	1/4		M16	M22 × 1.5	7	24.5	10.5	1/4
50	71	60	11	28	35	8	28	13	1/4							
63	80	67	13	35	40	10	35	14	3/8		M24	M30 × 1.5	10	35	14	3/8
80	126	108	17	45	45	14	45.5	14.5	3/8							