


Features

*Good endurance of vibration, corrosion abrasion and fiection.


*Many clours for choice.

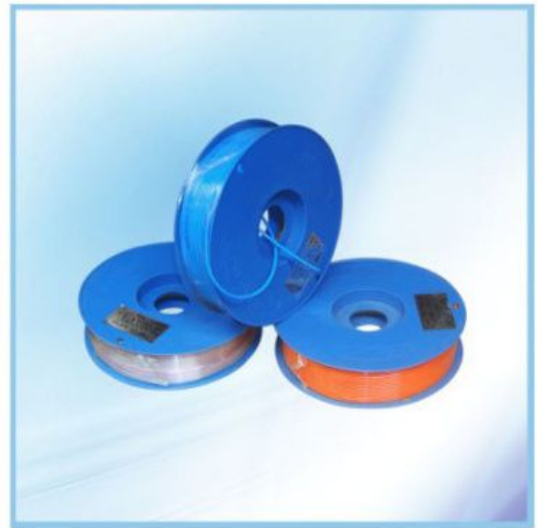

Technical parameter

| Fluid | Air, water, oil |
|-------------------|-------------------------|
| Pressure range | 0~12kgf/cm ² |
| Temperature range | -10~70℃ |

Ordering code

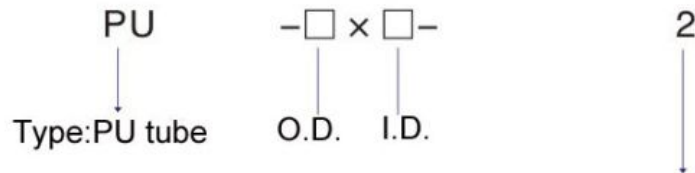

| Type | O.D. | I.D. | Standard length | Min bending radius | Weight |
|---------|------|------|-----------------|--------------------|--------|
| PU-0425 | 4 | 2.5 | 200 | 10 | 2.5 |
| PU-0530 | 5 | 3 | 200 | 12 | 4.1 |
| PU-0640 | 6 | 4 | 200 | 15 | 4.5 |
| PU-0850 | 8 | 5 | 100 | 15 | 4 |
| PU-0860 | 8 | 6 | 100 | 20 | 3.6 |
| PU-1065 | 10 | 6.5 | 100 | 27 | 6.6 |
| PU-1180 | 11 | 8 | 100 | 35 | 4.3 |
| PU-1280 | 12 | 8 | 100 | 37 | 8.6 |
| PU-1613 | 16 | 13 | 100 | 60 | 9.1 |
| PU-1/4 | 6.35 | 4.57 | 200 | 15 | 4.5 |
| PU-3/8 | 9.53 | 6.5 | 100 | 27 | 5.3 |
| PU-1/2 | 12.6 | 9.6 | 100 | 37 | 7.4 |

| | |
|----|--------------|
| 1 | Natural |
| 2 | Orange |
| 3 | Yellow |
| 4 | Green |
| 5 | Blue |
| 6 | Black |
| 7 | Red |
| 14 | Limpid green |
| 15 | Limpid blue |
| 16 | Limpid red |