

订购代码

S **FC** - **200** - **A**

S: middle type FR: filter regulator 200: 1/4PT Blank: non-pressure drainage
 F: air filter 300: 3/8PT A: automatic draining
 L: lubricator 400: 1/2PT H: manual drain
 FC: two combination unit
 C: three combination unit(f.r.l.)
 DV: end drainer




SFC

Technical parameters

Item	Model	SFR-200	SF-200	SFC-200	SC-200	SL-200	SDV-400
		SFR-300	SF-300	SFC-300	SC-300	SL-300	End drainer
		SFR-400	SF-400	SFC-400	SC-400	SL-400	
Fluid		Air					
Pipe size		1/4、3/8、1/2					1/2
Filter precision		40					40
Operating pressure range kgf/cm ²		0~8					
Max. operating pressure kgf/cm ²		9.5					
Temperature °C		5~60					
Storage capacity ML		130.5					164
Oil capacity ML		130.5					
Lubrication oil		Turbine oil (ISO Vg32)					
Oil separation efficiency %		90					
Symbol							

SDV

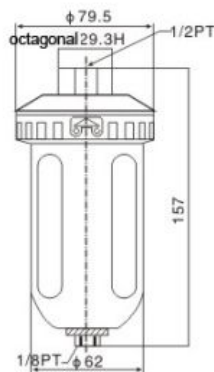

SDV

